

# DLW Flooring Accessories

## 2. Hollow groove skirting HSLA

HSLA is a solution of flooring strengthened by an aluminum backing which will be delivered already combined from DLW Flooring. The HSLA is very aesthetic because of its narrow radius and also easy to clean. The hollow groove skirting HSLA can be used on any types of subfloors and as well for vinyl as for linoleum flooring up to 3.2 mm thickness.

### 2.1 Installation


For cutting butt and mitred joints DLW Flooring will provide, a special electrical mitring saw, at an appropriate rental charge. For smaller projects a hand mitre saw with special holder will be sufficient. If there is no plaster skirting, we recommend painting or papering the walls before installing the coved skirting. For a perfect looking joint between wall and HSLA the matching edge trims showed in chapter one of DLW Flooring accessories can be used. Contact adhesive is used for glueing. The floor covering is scored with an under-and-over scribe to leave a 0.5 mm gap where it joins the section of the skirting, then trimmed with a knife. Sealing is done with weld rod.

### 2.2 Form of delivery and dimensions

Site related manufacture of a minimum of one roll 200 cm wide is required.

Skirting height: 10 cm  
 Width of flange: 6 cm  
 Length: 250 cm

**Article-No.** 10060 Linoleum / Vinyl

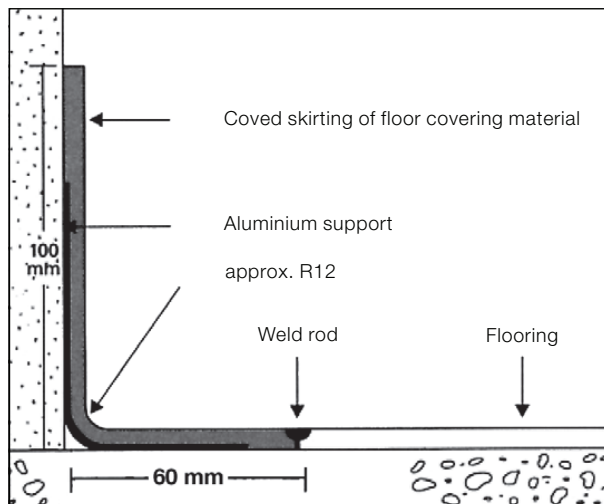

Mark walls for positioning of product.



Carry out the same procedure for floor alignment.



Apply contact adhesive up to the markings on floor and wall.



Fix cut-to-measure HSLA skirting in place.



Rub down well to achieve good transfer of adhesive.



Trim off protruding covering strips and seal with weld rod



A satisfactory sound finish should now be achieved.

## 2.3 Sealing

The corner areas can be permanently sealed

- with colour matching sealing compound
- with colour matching weld rod (linoleum)


This is carried out with a hot weld gun. After sealing any excess weld is to be removed with a flexible knife or a crescent shaped cutter, to achieve a smooth surface finish and secure join.




## Scala Connect Underlayment

### Sound impact reduction of approximately 18 dB

The Scala Connect Underlayment is a perfect addition to the Scala Connect collections of DLW Flooring. Together with the Scala Connect collections it improves sound impact reduction of approximately 18 db as well as walking noise. When laying on demonstration areas the Scala Connect Underlayment plays its special characteristics: Its anti-slip surface prevents the floated installed planks from shifting during use. The underlayment is balancing irregularities of the underground up to 1 mm. It is suitable for all ready to install undergrounds appropriate to VOB part C, DIN 18365.

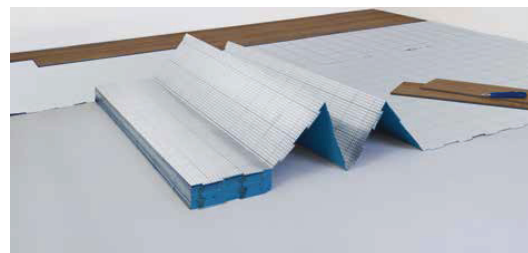

Quick and easy installation with well-tried folding technique

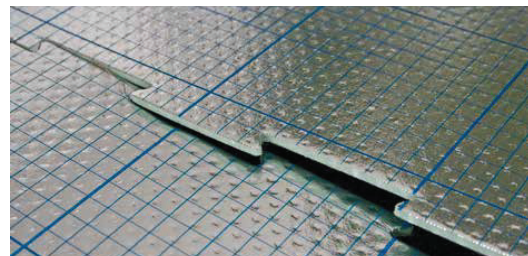

Easy connect between sheets without deepened areas and overlap



Accurate cutting and handling